



Open Workboats



All Polarcirkel Boats are self-bailing and have rigid pontoons filled with polystyrene that make them virtually unsinkable.



Open Workboats are also available with inboard diesel engines from 130-300Hp.

Rugged workboats for extreme weather conditions ...

These robust Open Workboats offers great design, quality build, unique flexibility, user-friendliness and low maintenance. Polarcirkel boats are self-bailing, and in contrast to a conventional RIB, have rigid pontoons filled with polystyrene. Combined with 21° V-shaped hull, this design makes a virtually unsinkable boat with unique stability and excellent seaworthiness.

All Polarcirkel boats are tested in extreme weather conditions all over the world. All models are loaded with smart details and unique features for safe operation in tough conditions and we ensure our products have an emphasis on safety and the environment.

Indeed, the HDPE-100 plastic is LNG-based with great recycling properties.



Smart design, flexible materials and equipment make Polarcirkel a unique choice for the discerning professional.

Open Workboats



Polarcirkel Workboats are specially designed for marine industries, coast guard, diving and other professional activities.




Smart details such as sloping pontoons with integrated steps, make it easier to get back onboard from the water.



AKVA group also offers a robust inboard series with a cabin solution for working in colder weather conditions.



AKVA group is the world's largest supplier of aquaculture technology, promoting well known brand names such as: Wavemaster, Polarcirkel, Fishtalk and Akvasmart.

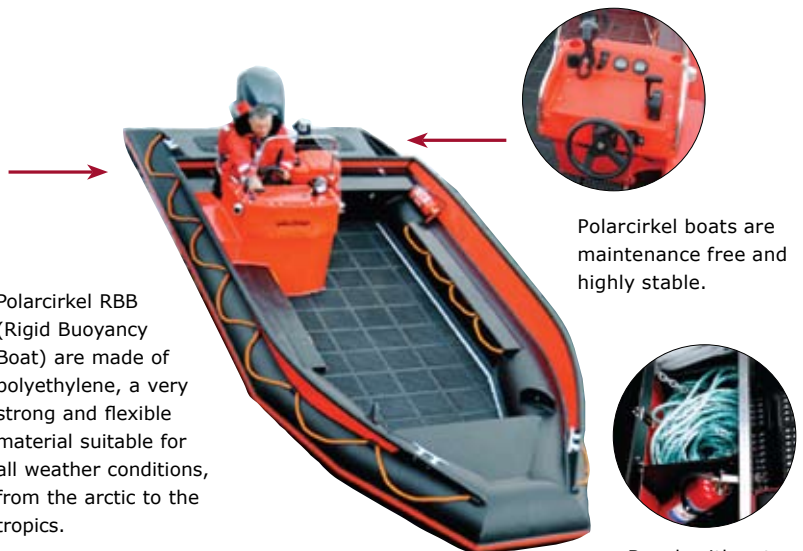

Polarcirkel RBB (Rigid Buoyancy Boat) are made of polyethylene, a very strong and flexible material suitable for all weather conditions, from the arctic to the tropics.

Polarcirkel boats are maintenance free and highly stable.

Bench with extra stowage space.

Open Workboats*	560	660	760	820
Lenght (LOA):	560cm (18'5")	660cm (21' 8")	760cm (25')	820cm (27')
Beam (BOA):	205cm (6' 9")	248cm (8' 2")	270cm (8' 10")	270cm (8' 10")
Displacement:	650kg/1430 lbs	850kg/1870 lbs	1090kg/2400 lbs	1200kg/2650 lbs
Max hp:	100hp	150hp	200hp	200hp
Recommended HPS:	From 80hp	From 115hp	From 150hp	From 150hp
Max load:	1000kg/2200 lbs	1250kg/2760 lbs	2250kg/4960 lbs	2250kg/4960 lbs
Max persons:	10	12	15	15
Polyethylene HDPE-100:	•	•	•	•
Shaft:	Long	X-Long	X-Long	X-Long
V-bottom 21° :	•	•	•	•

* Inboard and outboard

Open Workboats, standard equipment:

- 4 pcs mooring cleats
 - Extra protective hull strips
 - Stowage space with hatch
 - Manual bilge pump
 - Self-bailing deck
 - Red gunwales
 - Fire extinguisher
 - Anchor and rode
 - Non-skid rubber deck mat outside
 - Red HDPE rub rail on pontoons
 - Built-in steps in aft pontoons
 - Hydraulic steering wheel
 - CE approved, category C
 - RPM gauge, temperature gauge, oil pressure gauge, voltmeter and tilt indicator
 - Steering console with instrumentation and antenna arch with nav-lights
- Outboard only:**
- 4 x lifting eyes
 - Step boards
 - Fuel tank: 67L (17.7 US Gal.) or 103L (27.2 US Gal.)
 - Fuel gauge
 - Battery compartment under bench
 - Guard rails around bench
 - Seat with stowage space
- Optional equipment:**
- Search lights, work lights, antenna arch, bow platform with pulpits, marine electronics, etc.
- Inboard only:**
- Dashboard mounted controls
 - Electric bilge pump with sensor
 - Battery, main switch & ignition lock
 - Insulated engine hatch with pneumatic lifters
 - Built-in diesel tanks 2 x 200 litres

The Global Leader in Aquaculture Technology

- Plastic Cages • Steel Cages • Feed Barges • Feed Systems • Recirculation Systems • Camera & Sensor Systems
- Farming and Seafood Software • Boats • Docks & Marinas • HDPE Piping • Net Services • Net Cleaning • Underwater Lights

